

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 August 2005 (04.08.2005)


PCT

(10) International Publication Number  
**WO 2005/070598 A1**

- (51) International Patent Classification<sup>7</sup>: **B23D 53/12**
- (21) International Application Number:  
PCT/US2005/000146
- (22) International Filing Date: 5 January 2005 (05.01.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/535,292 9 January 2004 (09.01.2004) US  
60/558,170 31 March 2004 (31.03.2004) US
- (71) Applicant and  
(72) Inventor: GLYNN, Joseph P. [US/US]; 7525 Forsyth, St. Louis, MO 63105 (US).
- (74) Agent: LUCCHESI, Lionel L.; POLSTER, LIEDER, WOODRUFF & LUCCHESI, 12412 Powerscourt Drive, Suite 200, St. Louis, MO 63131-3615 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POWERED SAW

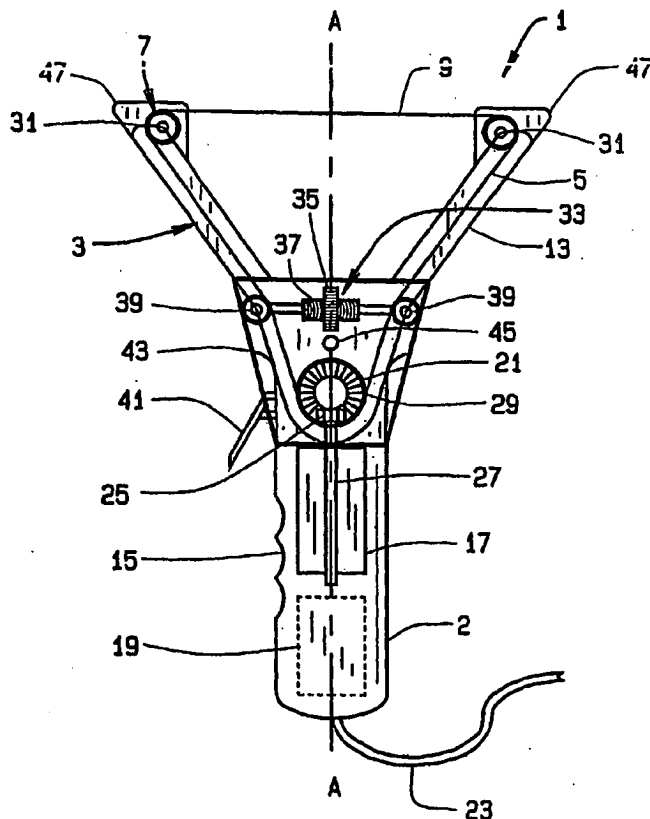

(57) Abstract: A powered saw 1 includes a frame 3 with a continuous loop blade 5 positioned in a coplanar relationship with the frame 3 along a system of blade guides 7 so that a cutting surface 9 of the blade 5 faces a desired cutting area. The relative positions between the frame arms 13, the frame handle 2, and the blade 5 provides a degree of stability and control that allows the operator to precisely and accurately control the cutting surface 9 of the blade 5 along curves, notches, and protrusions, including those involved in coping. In addition, this arrangement results in a compact design that positions the cutting surface 9 in close proximity to the handle 2.